



- Outdoor / Indoor round luminaire for installation on ceiling or wall – surface mounted.
- Configuration: opal plastic diffuser with satin finish for a high light emission uniformity ratio. Die-cast aluminium fixing back-plate and turned aluminium structure and heat sink. Magnetic finish frame to hide the fixing screws. The luminaire is coated with polyester powders in single or double colour.
- Protection rating: IP66
- In compliance with EN 60598-1 standards
- Class of Insulation: I
- Installation: the luminaire is equipped with two cable holders for rubber cables $5 < \varnothing < 10\text{mm}$ (Anna $\varnothing 210$ and $\varnothing 310$) or cables $6 < \varnothing < 13\text{mm}$ (Anna $\varnothing 410$) and a quick-connect 2-pole terminal block. Outdoor installation requires suitable flexible cables assuring the watertightness of the cable holder.

EU Regulation 874/2012 - Illumination equipment energy classes



LED VERSION:
Class A/A+/A++
Luminaire supplied
with integrated LED modules
that cannot be replaced



.1 White



.6 Grey



.3 Anthracite



.4 Black



.18 Deep Brown



Ceiling fitting






Wall fitting



The fitting is equipped
with 2 cable input.



Protection against
impact.
IK 10- 20,00 joule

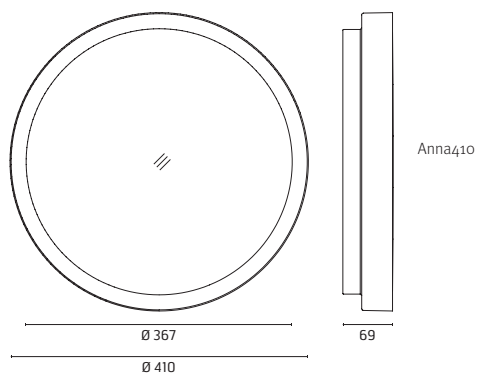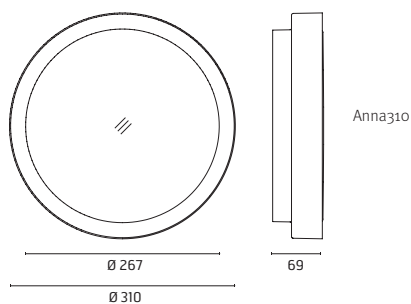

Accessories: Anna


| acc. code ▶ | 237 |
|--------------|-----|
| prod. code ▼ | |
| 533001 | • |
| 533002 | • |
| 533003 | • |
| 533004 | • |
| 533005 | • |
| 533006 | • |
| 533007 | • |
| 533008 | • |

| acc. code ▶ | 237 |
|--------------|-----|
| prod. code ▼ | |
| 533009 | • |
| 533010 | • |
| 533011 | • |
| 533012 | • |
| 533013 | • |
| 533014 | • |
| 533015 | • |
| 533016 | • |



| acc. code ▶ | 237 |
|--------------|-----|
| prod. code ▼ | |
| 533017 | • |
| 533018 | • |
| 533019 | • |
| 533020 | • |
| 533021 | • |
| 533022 | • |
| 533023 | • |
| 533024 | • |

| acc. code ▶ | 237 |
|--------------|-----|
| prod. code ▼ | |
| 533025 | • |
| 533026 | • |
| 533028 | • |
| 533029 | • |
| 533030 | • |

237
SPD: (SURGE PROTECTION DEVICE) 275Vac
MAXIMUM DISCHARGE CURRENT 10kA (8/20µs)
MAXIMUM OPERATING CURRENT 5A
SUITABLE FOR SERIES CONNECTION - IP66





Anna210 Mid-Power LED



533001 A A+ A++


NATURAL WHITE 4000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1325 ≠ Lm OUTPUT 802
CRI>80
Integral electronic power supply



533002 A A+ A++



WARM WHITE 3000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1261 ≠ Lm OUTPUT 765
CRI>80
Integral electronic power supply

Anna310 Mid-Power LED



533011 A A+ A++


NATURAL WHITE 4000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2153 ≠ Lm OUTPUT 1258
CRI>80
Integral electronic power supply
Dimmable on request



533012 A A+ A++



WARM WHITE 3000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2049 ≠ Lm OUTPUT 1200
CRI>80
Integral electronic power supply
Dimmable on request

Anna410 Mid-Power LED




533021 A A+ A++

NATURAL WHITE 4000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4318 ≠ Lm OUTPUT 2340
CRI>80
Integral electronic power supply
Dimmable on request




533022 A A+ A++

WARM WHITE 3000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4109 ≠ Lm OUTPUT 2232
CRI>80
Integral electronic power supply
Dimmable on request

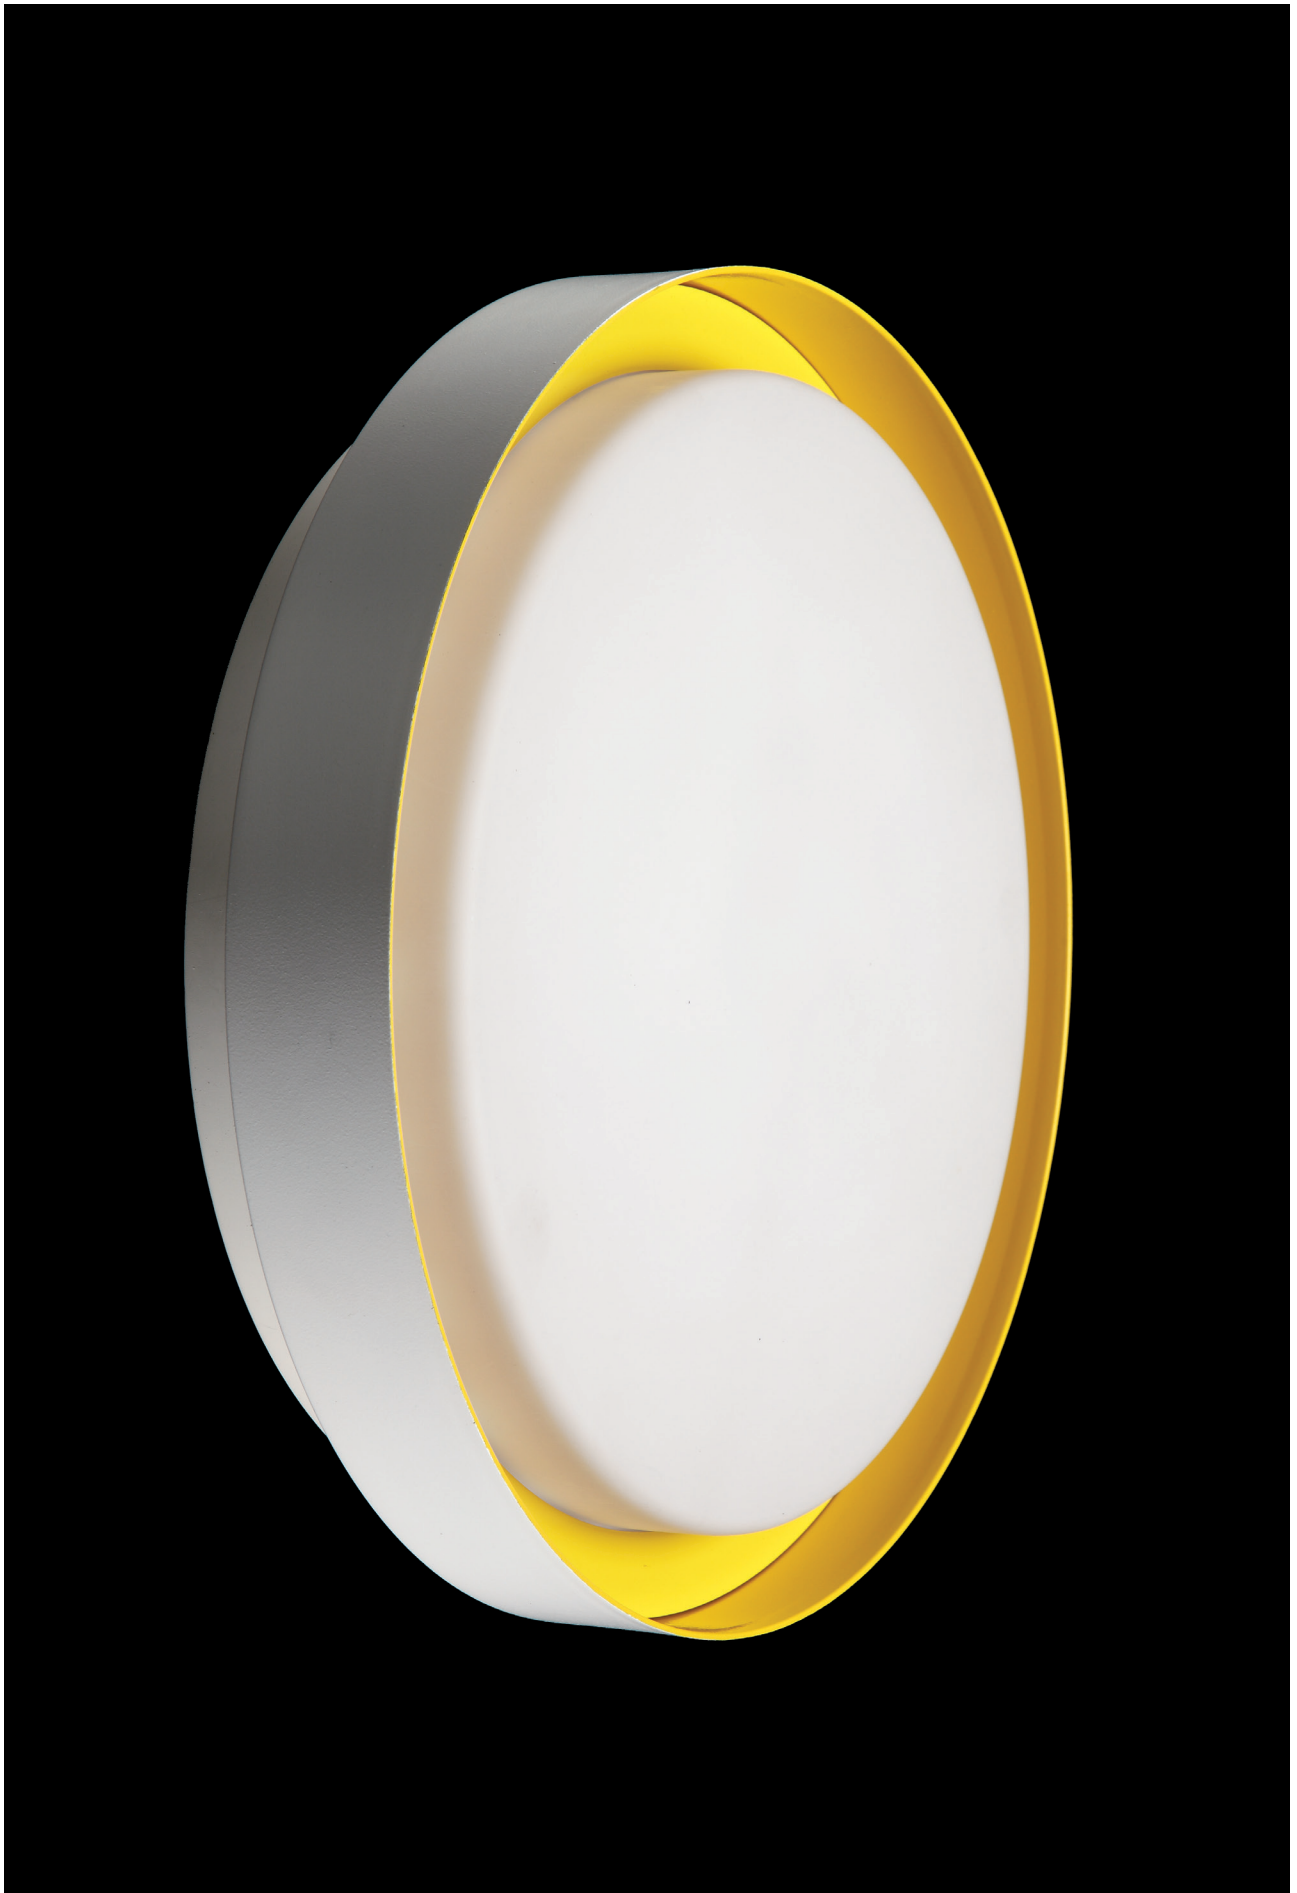

Anna210 Mid-Power LED / Bicolour Structure White-Yellow





533003 A A⁺ A⁺⁺


NATURAL WHITE 4000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1325 ≠ Lm OUTPUT 802
CRI>80
Integral electronic power supply

533007 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1261 ≠ Lm OUTPUT 765
CRI>80
Integral electronic power supply



Anna210 Mid-Power LED / Bicolour Structure White-Orange





533004 A A⁺ A⁺⁺


NATURAL WHITE 4000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1325 ≠ Lm OUTPUT 802
CRI>80
Integral electronic power supply

533008 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1261 ≠ Lm OUTPUT 765
CRI>80
Integral electronic power supply



Anna210 Mid-Power LED / Bicolour Structure White-Brown





533005 A A⁺ A⁺⁺


NATURAL WHITE 4000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1325 ≠ Lm OUTPUT 802
CRI>80
Integral electronic power supply

533009 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1261 ≠ Lm OUTPUT 765
CRI>80
Integral electronic power supply



Anna210 Mid-Power LED / Bicolour Structure White-Green





533006 A A⁺ A⁺⁺


NATURAL WHITE 4000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1325 ≠ Lm OUTPUT 802
CRI>80
Integral electronic power supply

533010 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
8,7W/220÷240V
Total power 11W
Lm LED 1261 ≠ Lm OUTPUT 765
CRI>80
Integral electronic power supply




Anna310 Mid-Power LED / Bicolour Structure White-Yellow




533013 A A⁺ A⁺⁺
NATURAL WHITE 4000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2153 ≠ Lm OUTPUT 1258
CRI>80
Integral electronic power supply
Dimmable on request

533017 A A⁺ A⁺⁺
WARM WHITE 3000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2049 ≠ Lm OUTPUT 1200
CRI>80
Integral electronic power supply
Dimmable on request

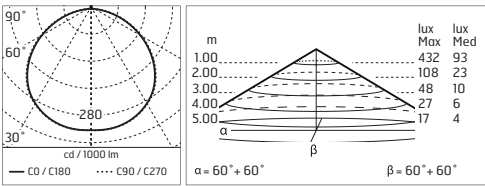


Anna310 Mid-Power LED / Bicolour Structure White-Orange




533014 A A⁺ A⁺⁺
NATURAL WHITE 4000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2153 ≠ Lm OUTPUT 1258
CRI>80
Integral electronic power supply
Dimmable on request

533018 A A⁺ A⁺⁺
WARM WHITE 3000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2049 ≠ Lm OUTPUT 1200
CRI>80
Integral electronic power supply
Dimmable on request

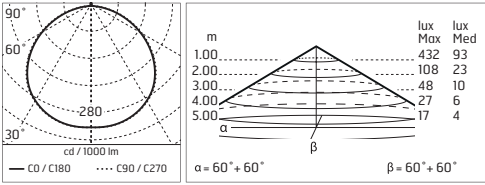


Anna310 Mid-Power LED / Bicolour Structure White-Brown




533015 A A⁺ A⁺⁺
NATURAL WHITE 4000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2153 ≠ Lm OUTPUT 1258
CRI>80
Integral electronic power supply
Dimmable on request

533019 A A⁺ A⁺⁺
WARM WHITE 3000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2049 ≠ Lm OUTPUT 1200
CRI>80
Integral electronic power supply
Dimmable on request

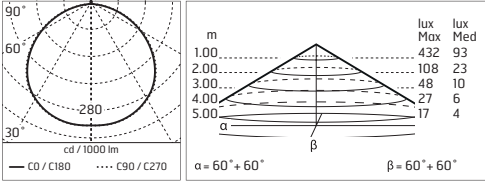


Anna310 Mid-Power LED / Bicolour Structure White-Green




533016 A A⁺ A⁺⁺
NATURAL WHITE 4000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2153 ≠ Lm OUTPUT 1258
CRI>80
Integral electronic power supply
Dimmable on request

533020 A A⁺ A⁺⁺
WARM WHITE 3000K
MID-POWER LEDs
14,1W/220÷240V
Total power 18W
Lm LED 2049 ≠ Lm OUTPUT 1200
CRI>80
Integral electronic power supply
Dimmable on request

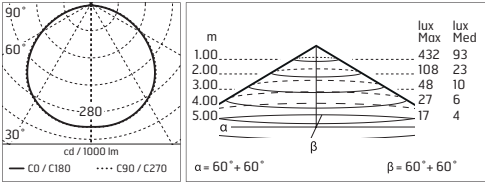

Anna410 Mid-Power LED / Bicolour Structure White-Yellow



MID-POWER LED

533023 A A⁺ A⁺⁺



NATURAL WHITE 4000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4318 ≠ Lm OUTPUT 2340
CRI>80

Integral electronic power supply
Dimmable on request

533027 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4109 ≠ Lm OUTPUT 2232
CRI>80

Integral electronic power supply
Dimmable on request



Anna410 Mid-Power LED / Bicolour Structure White-Orange



MID-POWER LED

533024 A A⁺ A⁺⁺



NATURAL WHITE 4000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4318 ≠ Lm OUTPUT 2340
CRI>80

Integral electronic power supply
Dimmable on request


533028 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4109 ≠ Lm OUTPUT 2232
CRI>80

Integral electronic power supply
Dimmable on request



Anna410 Mid-Power LED / Bicolour Structure White-Brown



MID-POWER LED

533025 A A⁺ A⁺⁺



NATURAL WHITE 4000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4318 ≠ Lm OUTPUT 2340
CRI>80

Integral electronic power supply
Dimmable on request


533029 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4109 ≠ Lm OUTPUT 2232
CRI>80

Integral electronic power supply
Dimmable on request



Anna410 Mid-Power LED / Bicolour Structure White-Green



MID-POWER LED

533026 A A⁺ A⁺⁺

NATURAL WHITE 4000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4318 ≠ Lm OUTPUT 2340
CRI>80

Integral electronic power supply
Dimmable on request

533030 A A⁺ A⁺⁺

WARM WHITE 3000K
MID-POWER LEDs
27,9W/110÷240V
Total power 34W
Lm LED 4109 ≠ Lm OUTPUT 2232
CRI>80

Integral electronic power supply
Dimmable on request

