
ISI 12X24

Giancarlo Tintori

Family of no trim LED and fluorescent recessed downlights fixtures for diffused lighting. Matt white powder-coated aluminium structure with opal poliycarbonate.

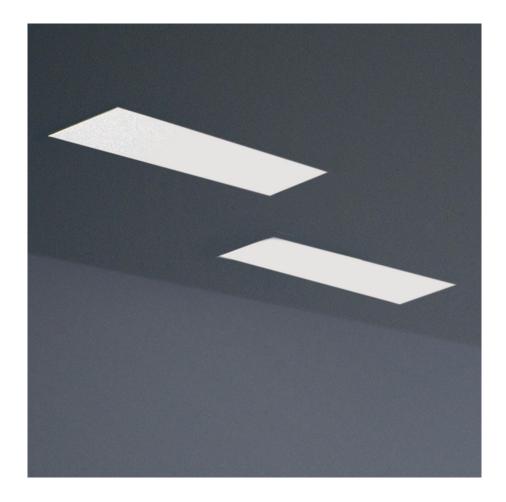

NEMO - www.nemolighting.com

LED

24

LAMPING

Source LED board
Total power 45W

Emission diffused

Switching dimmable 0-10

 Tension
 230V

 Color temperature
 2700K

 Luminous flux
 5700lm

 Typ cri
 80

 Energy class
 A+

Materials Aluminium/plexiglass opal

Notes recessed hole 28×16×H min 12 cm

Codes Structure

ISI LWW 62 white

Certificazioni



NEMO - www.nemolighting.com

lsi 12x24 - 2 / 2