


REGULUS WALL CANTILEVERED

Giancarlo Fassina and Carlo Forcolini

Range of fittings with a technical structure and two arms in extruded aluminium. Diffuser in white, transparent metacrylate. Aluminium parts can be painted in silver grey or, on demand, matt white. All versions (with the exception of the floor version) with uplight and downlight output, for an extremely functioning, widespread and adjustable lighting output.

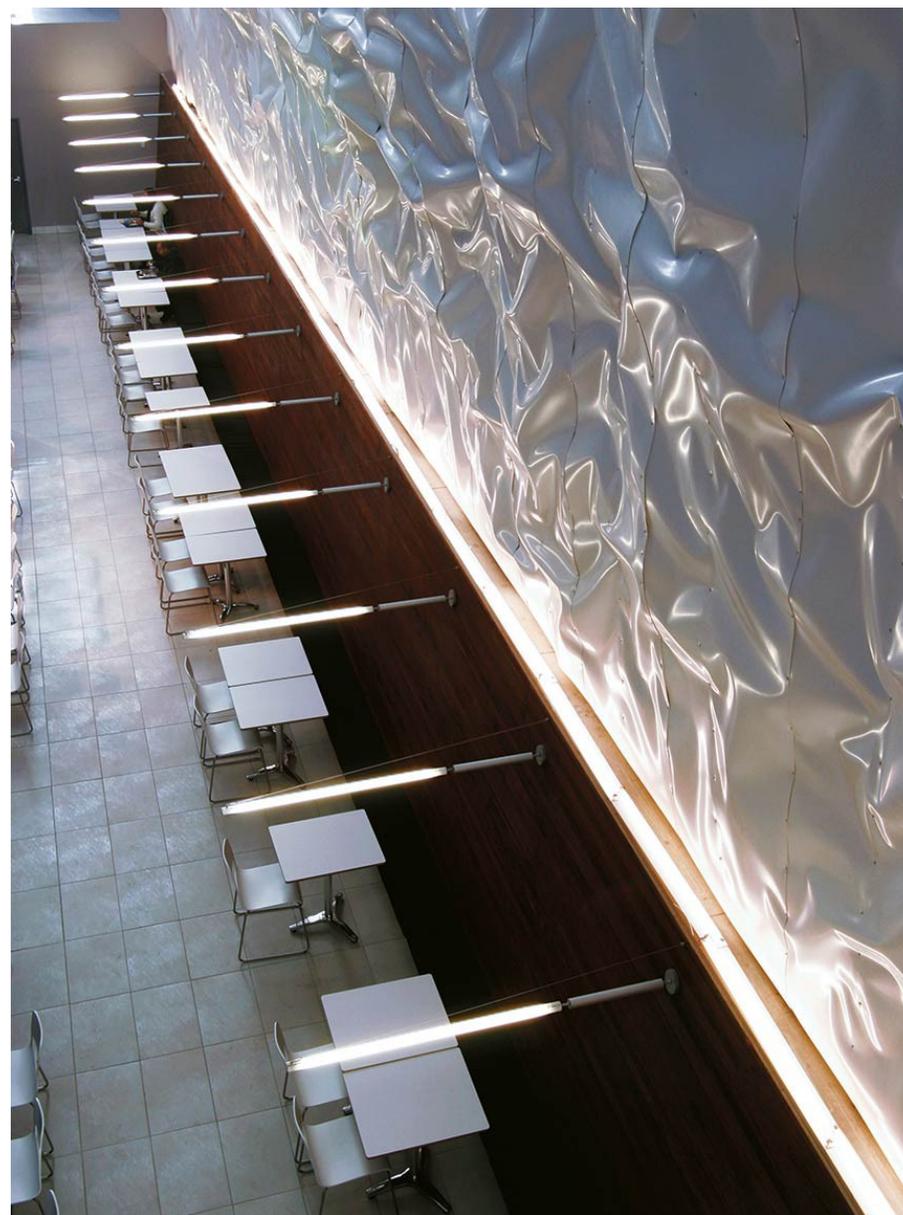

LED DIMMABLE DIRECT

LAMPING

Source	linear LED
Total power	30W
Emission	direct
Switching	dimnable, DALI, push
Tension	230V
Color temperature	3000K
Luminous flux	3900lm
Typ cri	83
Energy class	A+
Ip class	20
Materials	metal+PMMA

Codes

RED L3W 34



Structure

aluminium

PACKAGE

Package 01 27x15x200 cm / Gross weight: 5 Kg

Certificazioni



LED DIMMABLE INDIRECT

LAMPING

Source	linear LED
Total power	30W
Emission	indirect
Switching	dimnable, DALI, push
Tension	230V
Color temperature	3000K
Luminous flux	3900lm
Typ cri	83
Energy class	A+
Ip class	20
Materials	metal+PMMA

Codes

RED L3W 33

Structure

aluminium

Certificazioni

